



Cooling Fan Kit, 4-Stroke

Part# AB-10274-4T


Fits 2010 + RR/RS/RR-S 4 stroke models

Installation Instructions:

AB-10274-4T 4-Stroke Cooling Fan Kit includes the following items:

1. Fan motor and housing (1)
2. Fan brackets (2)
3. Mounting screws, fan bracket to fan (4)
4. Self-tapping screws, fan brackets to radiator (4)
5. Thermoswitch assembly with coupler (1)
6. Wire harness (1)

1. Remove the seat & fuel tank, right front side panel, then disconnect the battery.
2. Have a clean funnel & clean container ready to catch the coolant, as it will be reused.
3. With the engine cold, remove the radiator cap, & prepare to loosen the drain bolt on the water pump housing, having the funnel & a container ready.
4. Place the funnel in front of & under the drain bolt as coolant will want to flow outwards, being sure to catch the coolant in the container to let system fully drain.
5. After coolant has fully drained, remove the right side radiator then disconnect the hoses & remove the two bolts holding the radiator onto the frame.
6. With the radiator on the bench, remove the brass plug at the bottom & install the Thermoswitch, making sure the new aluminum washer is installed.

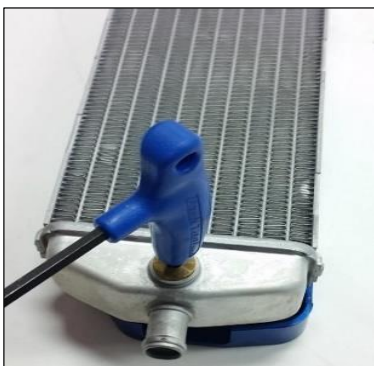



Cooling Fan Kit, 4-Stroke

Part# AB-10274-4T

Fits 2010 + RR/RS/RR-S 4 stroke models

Installation Instructions:

7. Install the fan brackets to the fan as shown using the four screws provided. The brackets are the same part number so they can be placed on either top or bottom of the fan.
8. Slide the fan bracket closely onto the back of the radiator as shown in the photo, plug the two wires into the Thermoswitch.
9. Adjust the bracket so that there is 45mm from the edge of the radiator to the bracket as shown.
10. Using a screw gun, use the four self-tapping screws to mount the fan brackets to the radiator.
11. Ziptie the wires at the top of the fan kit as shown to keep them secure & from chafing.
12. Re-install the radiator, hoses, & coolant, making sure the cooling system is bled. Plug the fan kit into the open connector on the motorcycles stock wire loom.
13. Reinstall the fuel tank, radiator shroud, reconnect the battery & install the seat.

