




TMD Rear Disc Guard

Part# AB-21411

Fits: 2005+ RR, RS, RR-S, XTrainer (Except 125 RR-S)

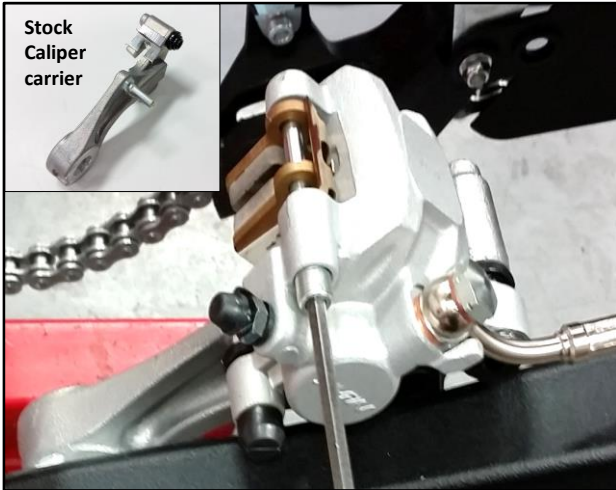

Installation Instructions:

1. Remove the rear wheel & axle, remove the rear brake pad pin plug, brake pad pin, & slide out the brake pads.
2. Slide entire brake caliper carrier bracket backwards off the locating block of the swing arm.
3. Separate the brake caliper from the caliper carrier bracket (bottom half) by sliding it off the pins.
4. Remove the rubber boot, the locating pin & pad wear plate from the stock bracket.
5. The TMD disc guard caliper carrier will also use the rubber boot, pin & wear plate of the caliper bracket.
6. Install these 3 parts in the same locations on the TMD disc guard carrier.
7. Use medium strength (blue) thread locking agent on the locating pin threads, & apply a small amount of high quality grease on the locating pins.
8. Install the caliper by lining up the 2 locating pins with the 2 rubber boots & slide them into each other.
9. Slide the Disc Guard carrier bracket forward onto the swing arm locating block & line up the axle holes.
10. Re-install the brake pads, pin, & pin plug.
11. Before installing the rear wheel, wipe any debris off the rear axle, spacers & mounting points.
12. Reapply a thin layer of axle grease on the axle.
13. Align the rear wheel & recheck brake caliper mounting.
14. Tighten the rear axle nut to the specified torque, mark fasteners with a sharpie enable quick fastener checks.
15. Before riding, push on the brake pedal to re-pressurize the brake fluid.