




# Beta Radiator Brace Kit

Part# AB-22175

Fits: 2020+ RR/RR-S Models

## Installation Instructions:

Note: Only install on a cool engine

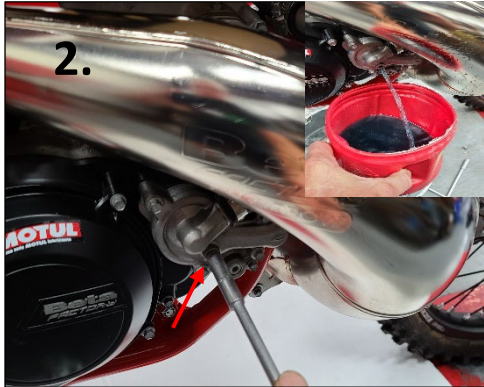


1. Remove the seat, fuel tank, and radiator louvers

2. Drain cooling system by removing the drain bolt and copper washer from the water pump cover. Loosen the radiator cap to start the coolant flow into a clean container for re use.




3. Loosen the left and right radiator hose clamps then remove the 4 radiator attachment bolts and washers. They will not be re used.

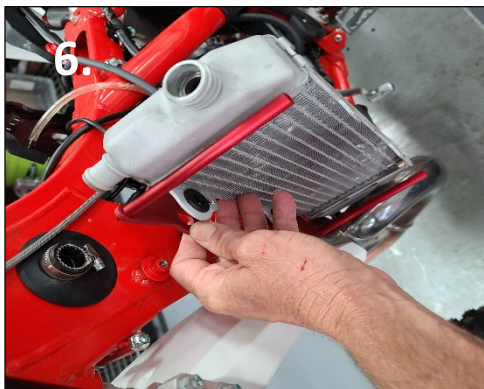

4. Attach the 4 cross bars to the left and right inner panel (**inner panel has 2 large holes**) using provided 6x16mm button head screws

5. Pull the radiator out of the top radiator hose. Remove the hose clamp and turn it over so it faces the opposite way.

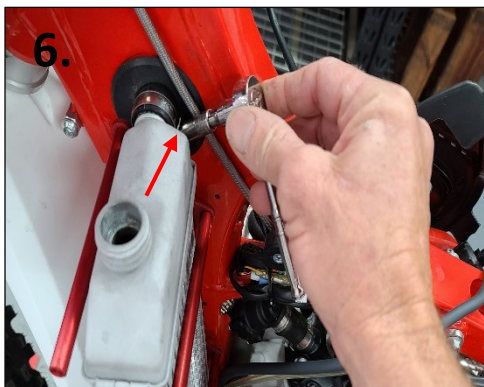

6. Slide the brace behind the radiator and in to place. Re install the radiator into the top hose and tighten the hose clamp.




# Beta Radiator Brace Kit


Part# AB-22175

Fits: 2020+ RR/RR-S Models

Installation Instructions, continued:

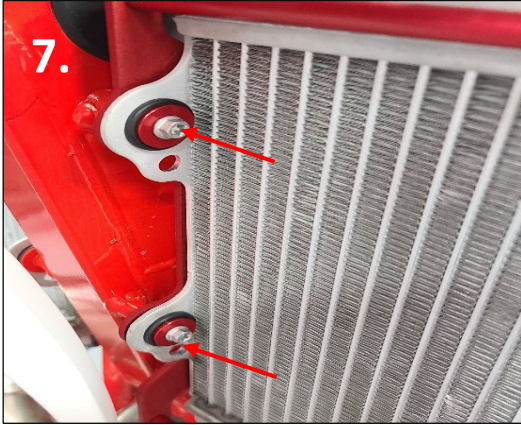


7. Use 2 hat washers and 2 6x20mm bolts to attach radiator back to frame on each side

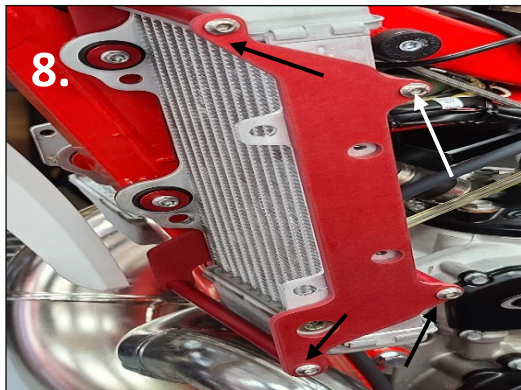

8. Use 4 button head screws to secure the outer panel into position. Repeat on opposite side.

9. Replace drain bolts and copper washers back into water pump. Torque to 10nm

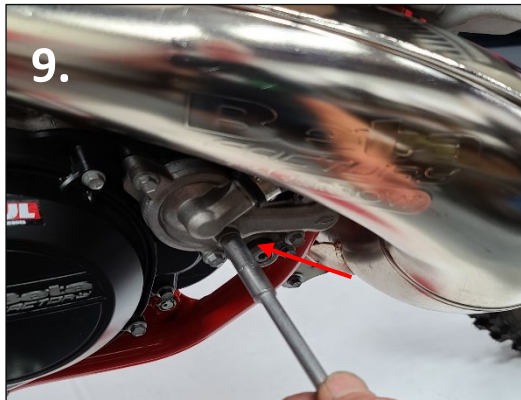

10. Refill Cooling system, re install louvers

11. Re install the fuel tank and secure the shrouds to the radiators using the 6x20 hex bolt and oval spacer.



12. Connect fuel line and install seat.

13. You are now ready to ride!!